

30G & 60G series


TECHNICAL DATASHEET

PRODUCT DETAILS	30G**	60G**
Filter Media	Inorganic microfibre	
Seals	NBR / FPM (see ordering code)	
Working temperature	- 25 °C - +110 °C	
Fluid compatibility	H, HL, HLP, HVLP, HEES, HFC, HFD (for other fluids, please contact RMF Systems)	
Max. working pressure	4,5 bar (Δp)	
Collapse pressure	10 bar (Δp)	
MATERIALS		
Caps	Nylon	
Internal core	Tinned steel	

FILTRATION EFFICIENCY	
G1	$\beta_4(c) > 1000$
G3	$\beta_5(c) > 1000$
G6	$\beta_7(c) > 1000$
G10	$\beta_{10}(c) > 1000$

QUALITY ASSURANCE	
ISO 3968	Δp test
ISO 16889	Multi Pass test

ORDERING CODE

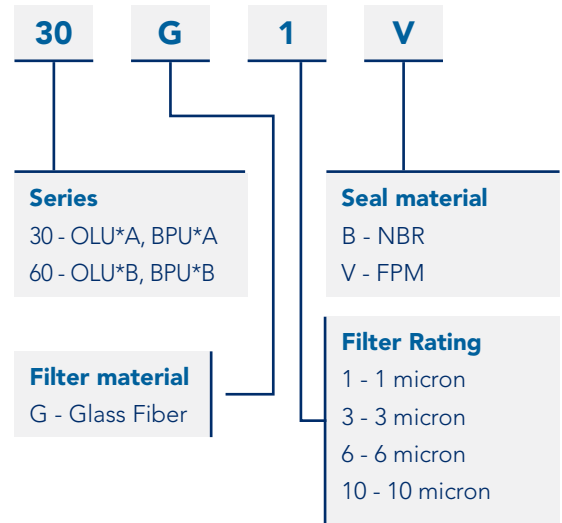

PRESURE DROP VS FLOW CHART

